



FLYBAT

LiFePO₄

LITHIUM IRON PHOSPHATE BATTERY



PRODUCT IMAGE

Advantages of the FLYBAT lithium iron phosphate (LiFePO₄) batteries:

- 5 year manufacturer's warranty
- The safest technology, without the risk of fire or explosion
- Integrated BMS
- Long service life
- Steadily improving storage capacity
- 99 % efficient
- High stability even under extreme loads
- No memory effect - no need for full charge and discharge cycles
- High performance even under extreme conditions
- Deep and steady discharge and charging efficiency
- Small size and light weight

ELECTRICAL SPECIFICATIONS

Nominal Voltage	38.4 V	Resistance	≤70 mΩ @ 50% SOC
Nominal Capacity	40 Ah	Efficiency	99%
Capacity @ 25A	280 min	Self Discharge	<3% per Month
Energy	1536 Wh	Maximum Modules in Series/parallel	0/4

MECHANICAL SPECIFICATIONS

Dimensions	Length	260 mm
	Width	180 mm
	Height	247 mm
Weight		12,8 kg
Terminal Type		M8
Terminal Torque		9 - 11 N-m
Case Material		ABS
Enclosure Protection		IP56
Chemistry		LiFePO ₄

TEMPERATURE SPECIFICATIONS

Discharge Temperature	-20 to 60 °C
Charge Temperature	0 to 55 °C
Storage Temperature	-20 to 60 °C
BMS High Temperature Cut-Off	80 °C

CHARGE SPECIFICATIONS

Recommended Charge Current	1.5 A - 15 A
Maximum Charge Current	30 A
Recommended Charge Voltage	42.6 V - 43.8 V
BMS Charge Voltage Cut-Off	46.8 V
Reconnect Voltage	45.6 V
Balancing Voltage	43.2 V

DISCHARGE SPECIFICATIONS

Maximum Continuous Discharge Current	40 A
Peak Discharge Current	80 A
BMS Discharge Current Cut-Off	120 A ±50 A
Recommended Low Voltage Disconnect	33 V
BMS Discharge Voltage Cut-Off	30 V
Reconnect Voltage	27.6 V
Short Circuit Protection	Yes





FLYBAT

LiFePO₄


LITHIUM IRON PHOSPHATE BATTERY




DIMENSIONAL SPECIFICATIONS

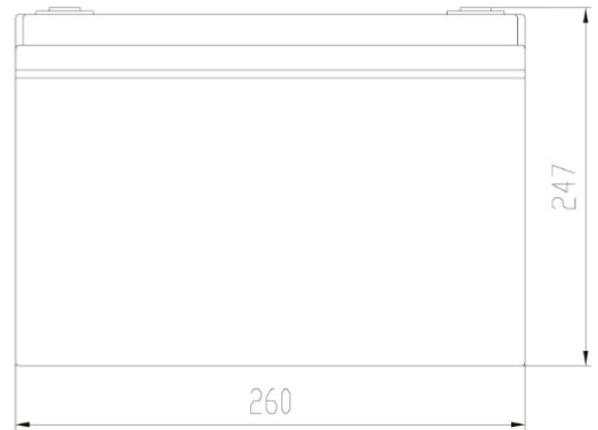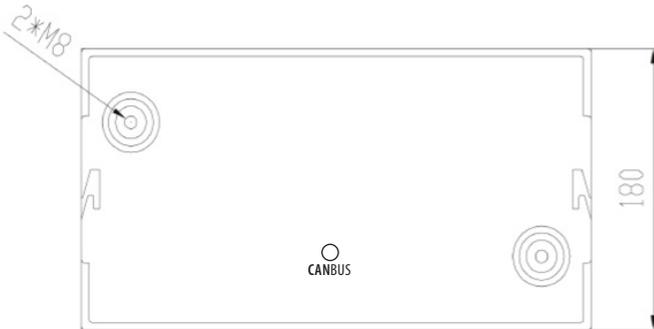


Charging Characteristics @0.5C 25°C

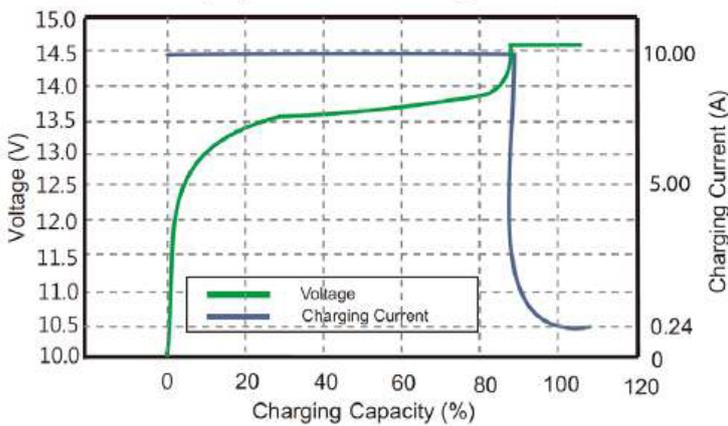


Different Rate Discharge Curve @25°C

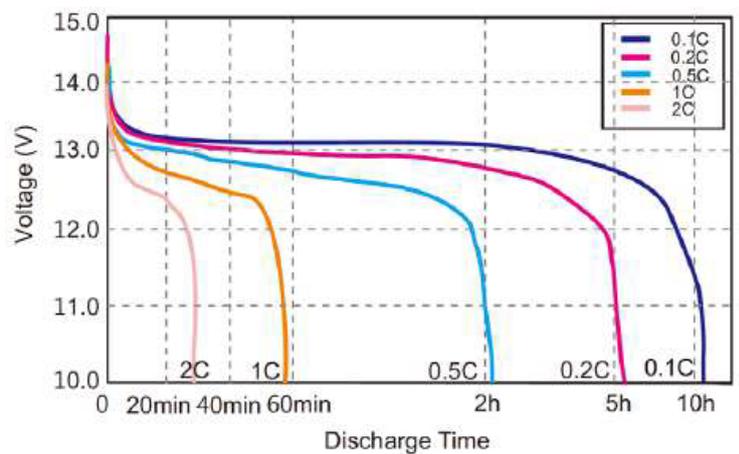

State of Charge Curve @0.5C 25°C

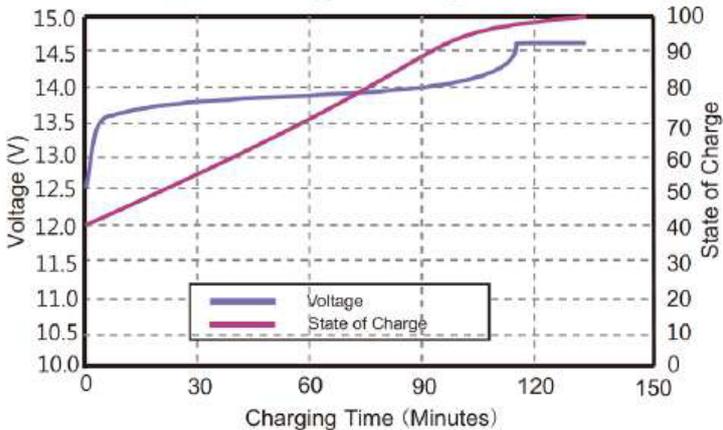

Different DoD Discharge Cycle Life @1C

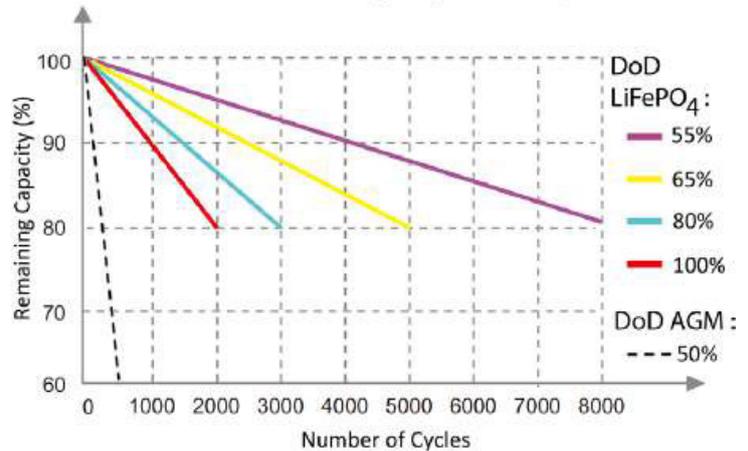

BVD GmbH
Am Leitzelbach 29
74889 Sinsheim

Telefon: 07261-94832-10
E-Mail: bvd@bvd24.de

BVD
Batterie Vertrieb Deutschland

please visit www.bvd24.de